

DS系列电脑飞梭多针绗缝机



DS Series Computerized High-end Shuttle Multi-needle Quilting Machine

用途 USE:

绗缝加工品：服装、睡袋、夏凉被、床罩、各种座垫等。

Products : garments, sleeping bags, quilts, bedspreads and all kinds of cushions etc.

示意图/working scheme

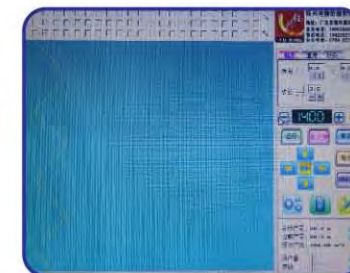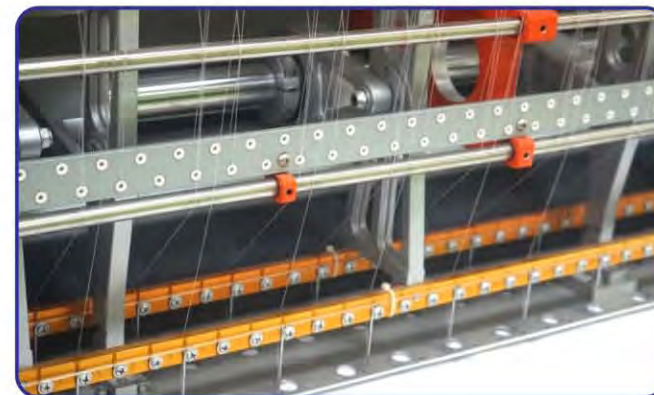

功能 FUNCTION :

- 1.全新升级电脑控制和机械制造工艺技术。
- 2.针排运动采用针杆架机构,无需另外加油,从而避免了油污面料的现象发生。
- 3.针杆架机构结构更牢固不易损坏,维护费用低。
- 4.鞍架及罗拉均采用进口伺服驱动设备。
- 5.采用鞍架导轨运动方式,运行稳定,花型更漂亮,断线率更低。
- 6.主轴采用伺服电机控制装置。
- 7.机器运行中电脑可调整速度500-1400之间,针距2mm-8mm任意设定。
- 8.采用鼠标直接打版方式,并且兼容绣花文件格式(DST DSB)。
- 9.可做360度任意绗缝.绗绣和无限次花样跨步绗缝.绗绣。
- 10.图案补偿功能,有效的解决因绗缝材料加厚产生图案变形问题。
- 11.先进实用的面线断线检测技术,断线自动停机功能。
- 12.机身.横梁(加强横梁)加固处理,机器运行更稳定。
- 13.自动加油系统,延长轴承使用寿命。

- 1.The upgraded computer control system and mechanical manufacturing process technology.
- 2.The needle bar running with needle bar frame,no need to add extra lube and avoid the materials be soiled by lube.
- 3.Needle bar frame structure is more firm and durable,so that the cost of maintenance is cheaper.
- 4.Both the saddle frames and the rollers are imported servo drive equipment.
- 5.Adopt sadding rack guide rail,steady running,patterns are more precise,lower thread break rate.
- 6.The spindle is controlled by servo motor.
- 7.Adjust speed by computer and the speed can reach 500-1400r/min,the stitch can be set between 2mm-8mm.
- 8.Adopt the mouse make pattern directly and compatible with embroidery file format (DST DSB)
- 9.360°random quilting and limitless multi-span and independent quilting.
- 10.The compensation function,an effective solution for looping pattern with thick material.
- 11.Advanced and practical testing upper thread broken techniques,the machine will auto-stop when thread is broken.
- 12..The fuselage of beam (steel cross member) is reinforced and the machine runs more stably.
13. Adopt automatic refueling system to extend bearing life.

主要技术参数/Main Technical Parameters

参数(单位mm) Parameter(Unit mm)	YXS-64-2DS/YXS-64-3DS	YXS-82-2DS/YXS-82-3DS	YXS-96-2DS/YXS-96-3DS	YXS-112-2DS/YXS-112-3DS	YXS-128-2DS/YXS-128-3DS
主机尺寸Size:L*W*H	3935*1750*1700	4425*1750*1700	4730*1750*1700	5340*1750*1700	5590*1750*1700
全机重量Weight	5000kg	6000kg	6500kg	7000kg	7500kg
绗缝宽度Quilting width	1650	2100	2450	2800	3200
针排距Needle bar space	2DS 76.2(3")3DS 152.4(3"+3")	2DS 76.2(3")3DS 152.4(3"+3")	2DS 76.2(3")3DS 152.4(3"+3")	2DS 76.2(3")3DS 152.4(3"+3")	2DS 76.2(3")3DS 152.4(3"+3")
针距Needle space	25.4	25.4	25.4	25.4	25.4
X行程X-axis movement	204	254	254	304	304
绗缝厚度Quilting thickness	≤50	≤50	≤50	≤50	≤50
步长Stitch	2-8	2-8	2-8	2-8	2-8
生产速度Output	10-260m/h	10-260m/h	10-260m/h	10-260m/h	10-260m/h
机针型号Needle type	#14,#16,#19	#14,#16,#19	#14,#16,#19	#14,#16,#19	#14,#16,#19
主轴转速Rolling speed	500-1400r/min	500-1400r/min	500-1400r/min	500-1400r/min	500-1400r/min
电压(AC)Rated voltage(AC)	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ
功率Power	5kw	6.5kw	7.5kw	8.5kw	8.5kw

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。

※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification. The pictures in catalogue are consult only. If there is any change, please according to the real object.

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。

※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification. The pictures in catalogue are consult only. If there is any change, please according to the real object.

D系列电脑飞梭多针绗缝机


D Series Computerized High-end Shuttle Multi-needle Quilting Machine

用途 USE:

绗缝加工品：服装、睡袋、夏凉被、床罩、各种座垫等。


Products :garments, sleeping bags, quilts, bedspreads and all kinds of cushions etc.

示意图/working scheme

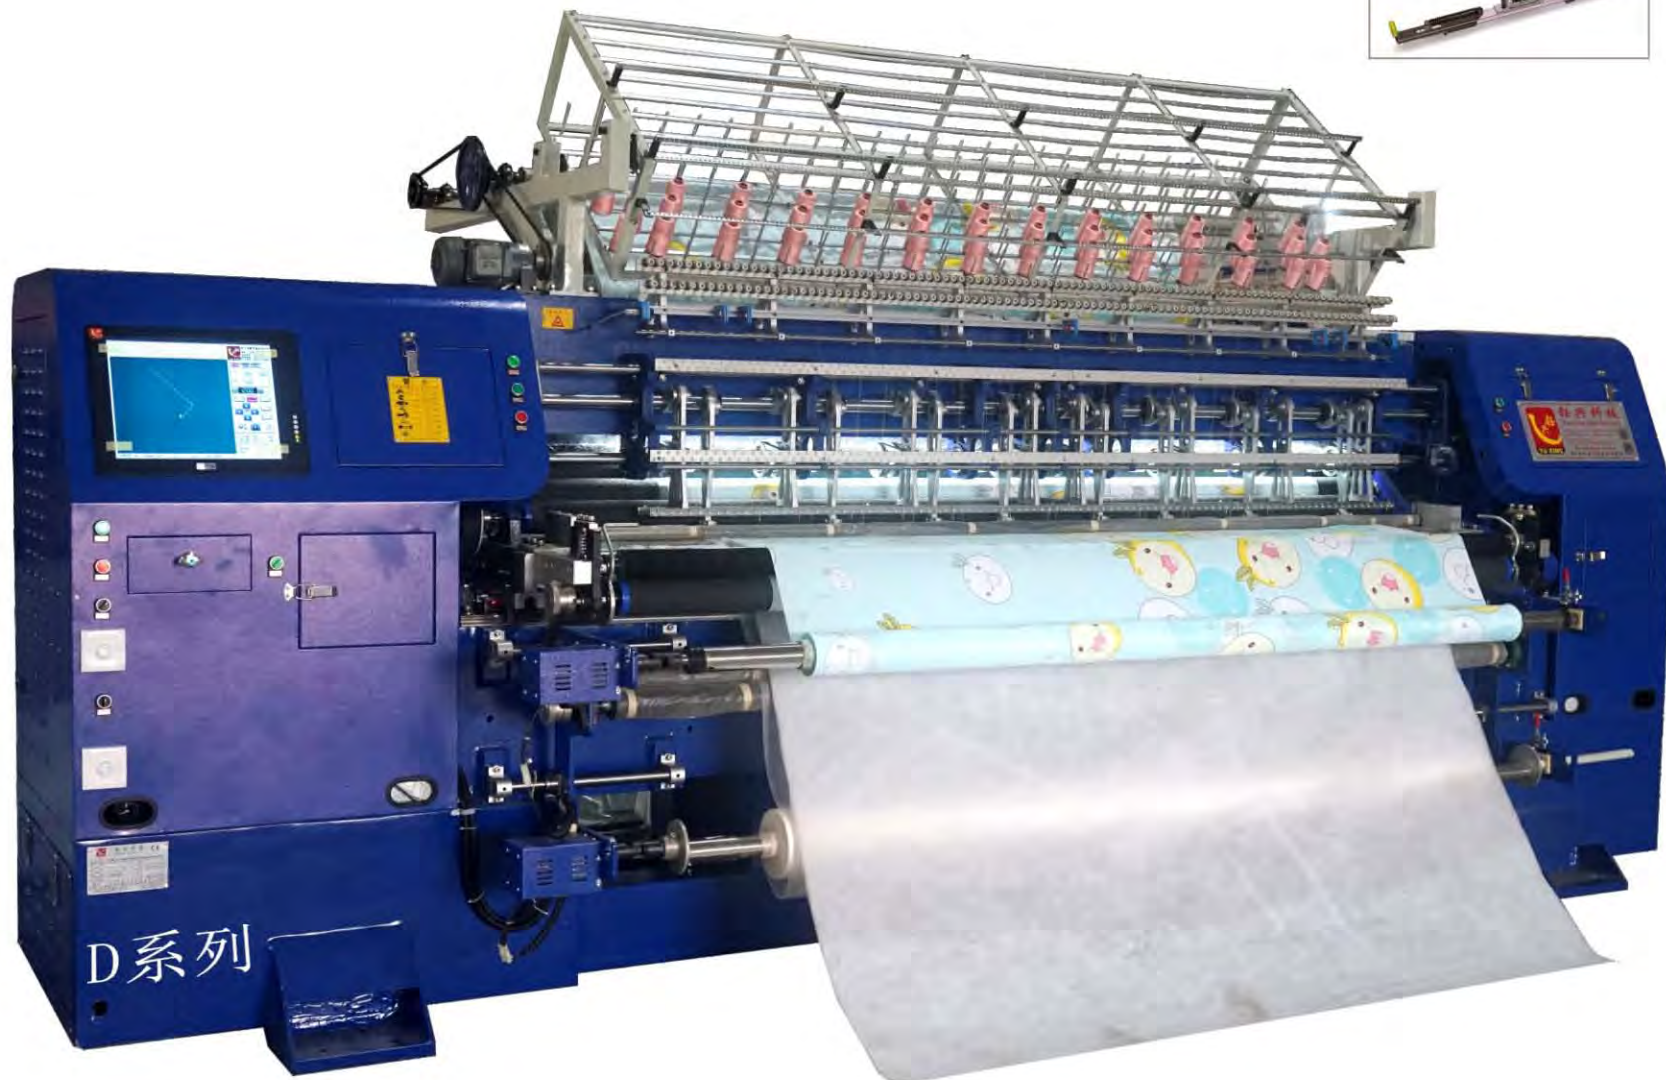

D系列

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
 ※Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification.
 The pictures in catalogue are consult only. If there is any change, please according to the real object.

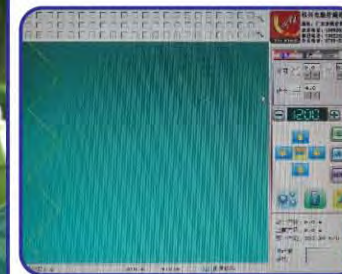

功能 FUNCTION :

- 1.全新升级电脑控制和机械制造工艺技术。
- 2.针排运动采用针杆架机构，无需另外加油，从而避免了油污面料的现象发生。
- 3.针杆架机构结构更牢固不易损坏，维护费用低。
- 4.鞍架及罗拉均采用进口伺服驱动设备。
- 5.采用鞍架导轨运动方式，运行稳定，花型更漂亮，断线率更低。
- 6.主轴采用变频控制装置。
- 7.机器运行中电脑可调整速度500-1200之间，针距2mm-8mm任意设定。
- 8.采用鼠标直接打版方式，并且兼容绣花文件格式（DST DSB）。
- 9.可做360度任意绗缝.绗绣和无限次花样跨步绗缝.绗绣。
- 10.图案补偿功能，有效的解决因绗缝材料加厚产生图案变形问题。
- 11.先进实用的面线断线检测技术，断线自动停机功能。
- 12.机身.横梁加固处理，机器运行更稳定。
- 13.自动加油系统，延长轴承使用寿命。

- 1.The upgraded computer control system and mechanical manufacturing process technology.
- 2.The needle bar running with needle bar frame,no need to add extra lube and avoid the materials be soiled by lube.
- 3.Needle bar frame structure is more firm and durable,so that the cost of maintenance is cheaper.
- 4.Both the saddle frames and the rollers are imported servo drive equipment.
- 5.Adopt sadding rack guide rail,steady running,patterns are more precise,lower thread break rate.
- 6.Principal axis adopt the frequency conversion device.
- 7.Adjust speed by computer and the speed can reach 500-1200r/min,the stitch can be set between 2mm-8mm.
- 8.Adopt the mouse make pattern directly and compatible with embroidery file format (DST DSB)
- 9.360°random quilting and limitless multi-span and independent quilting.
- 10.The compensation function, an effective solution for looping pattern with thick material.
- 11.Advanced and practical testing upper thread broken techniques,the machine will auto-stop when thread is broken.
- 12.The fuselage of beam is reinforced and the machine runs more stably.
13. Adopt automatic refueling system to extend bearing life.

主要技术参数/Main Technical Parameters

参数 (单位mm) Parameter(Unit mm)	YXS-64-2D/YXS-64-3D	YXS-82-2D/YXS-82-3D	YXS-96-2D/YXS-96-3D	YXS-112-2D/YXS-112-3D	YXS-128-2D/YXS-128-3D
主机尺寸Size:L*W*H	3935*1750*1700	4425*1750*1700	4730*1750*1700	5340*1750*1700	5590*1750*1700
全机重量Weight	4500kg	5500kg	6000kg	6500kg	7000kg
绗缝宽度Quilting width	1650	2100	2450	2800	3200
针排距Needle bar space	2D 76.2(3")3D 152.4(3"+3")	2D 76.2(3")3D 152.4(3"+3")	2D 76.2(3")3D 152.4(3"+3")	2D 76.2(3")3D 152.4(3"+3")	2D 76.2(3")3D 152.4(3"+3")
针距Needle space	25.4	25.4	25.4	25.4	25.4
X行程X-axis movement	204	254	254	304	304
绗缝厚度Quilting thickness	≤50	≤50	≤50	≤50	≤50
步长Stitch	2-8	2-8	2-8	2-8	2-8
生产速度Output	10-240m/h	10-240m/h	10-240m/h	10-240m/h	10-240m/h
机针型号Needle type	#14,#16,#19	#14,#16,#19	#14,#16,#19	#14,#16,#19	#14,#16,#19
主轴转速Rolling speed	500-1200r/min	500-1200r/min	500-1200r/min	500-1200r/min	500-1200r/min
电压(AC)Rated voltage(AC)	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ
功率Power	4kw	5.5kw	6.5kw	7.5kw	7.5kw

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
 ※Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification.
 The pictures in catalogue are consult only. If there is any change, please according to the real object.

CS系列电脑飞梭多针绗缝机



CS Series Computerized High-end Shuttle Multi-needle Quilting Machine

用途 USE:

绗缝加工品：服装、睡袋、夏凉被、床罩、各种座垫等。

Products : garments, sleeping bags, quilts, bedspreads and all kinds of cushions etc.

示意图/working scheme

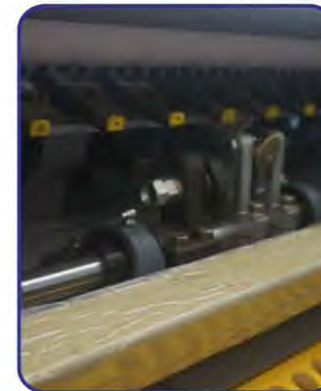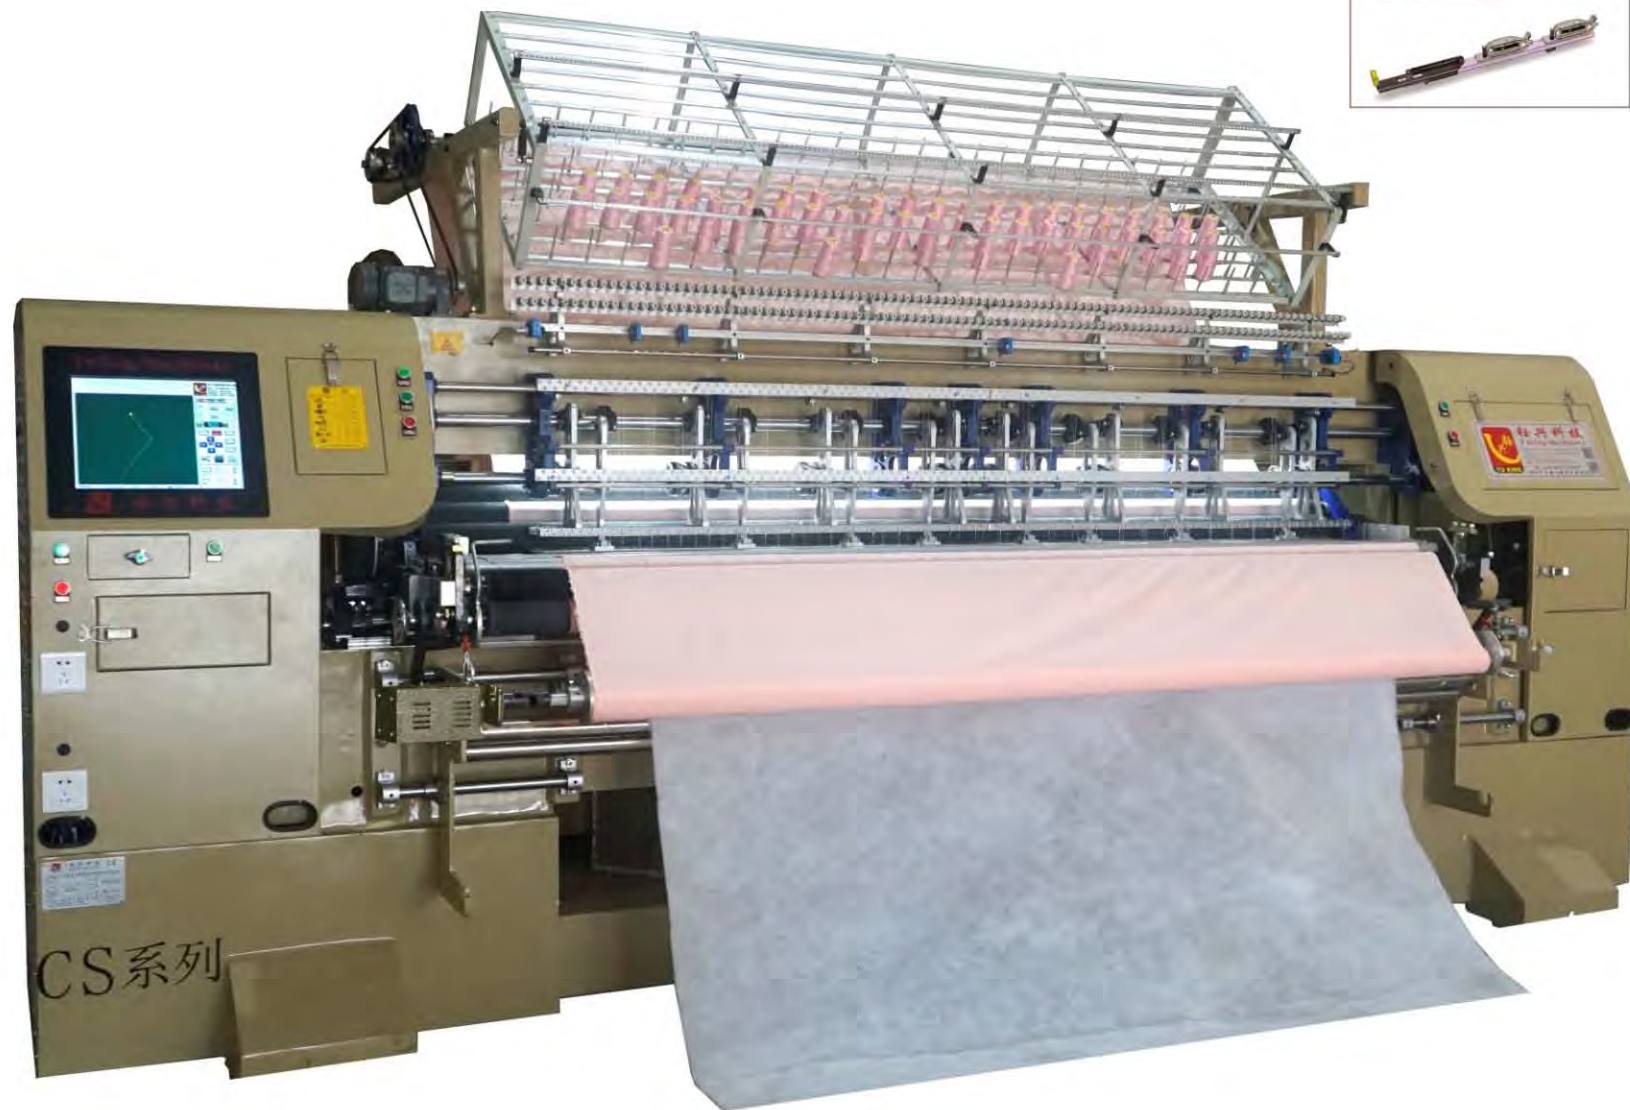

功能 FUNCTION :

- 1.全新升级电脑控制和机械制造工艺技术。
- 2.针排运动采用针杆架机构,无需另外加油,从而避免了油污面料的现象发生。
- 3.针杆架机构结构更牢固不易损坏,维护费用低。
- 4.鞍架及罗拉均采用伺服驱动设备。
- 5.采用鞍架导轨运动方式,运行稳定,花型更漂亮,断线率更低。
- 6.主轴采用变频控制装置。
- 7.机器运行中电脑可调整速度500-1000之间,针距2mm-8mm任意设定。
- 8.采用鼠标直接打版方式,并且兼容绣花文件格式(DST DSB)。
- 9.可做360度任意绗缝.绗绣和无限次花样跨步绗缝.绗绣。
- 10.图案补偿功能,有效的解决因绗缝材料加厚产生图案变形问题。
- 11.先进实用的面线断线检测技术,断线自动停机功能。
- 12.机身横梁加固处理,机器运行更稳定。

- 1.The upgraded computer control system and mechanical manufacturing process technology.
- 2.The needle bar running with needle bar frame,no need to add extra lube and avoid the materials be soiled by lube.
- 3.Needle bar frame structure is more firm and durable,so that the cost of maintenance is cheaper.
- 4.Both the saddle frames and the rollers are imported servo drive equipment.
- 5.Adopt sadding rack guide rail,steady running,patterns are more precise,lower thread break rate.
- 6.Principal axis adopt the frequency conversion device.
- 7.Adjust speed by computer and the speed can reach 500-1000r/min,the stitch can be set between 2mm-8mm.
- 8.Adopt the mouse make pattern directly and compatible with embroidery file format (DST DSB)
- 9.360°random quilting and limitless multi-span and independent quilting.
- 10.The compensation function, an effective solution for looping pattern with thick material.
- 11.Advanced and practical testing upper thread broken techniques,the machine will auto-stop when thread is broken.
- 12.The fuselage of beam is reinforced and the machine runs more stably.

主要技术参数/Main Technical Parameters

参数 (单位mm) Parameter(Unit mm)	YXS-64-2CS/YXS-64-3CS	YXS-82-2CS/YXS-82-3CS	YXS-96-2CS/YXS-96-3CS	YXS-112-2CS/YXS-112-3CS	YXS-128-2CS/YXS-128-3CS
主机尺寸Size:L*W*H	3600*1500*1700	4300*1500*1700	4600*1500*1700	5100*1500*1700	5500*1500*1700
全机重量Weight	4000kg	4500kg	5000kg	5500kg	6000kg
绗缝宽度Quilting width	1650	2100	2450	2800	3200
针排距Needle bar space	2CS 76.2(3")3CS 152.4(3"+3")	2CS 76.2(3")3CS 152.4(3"+3")	2CS 76.2(3")3CS 152.4(3"+3")	2CS 76.2(3")3CS 152.4(3"+3")	2CS 76.2(3")3CS 152.4(3"+3")
针距Needle space	25.4	25.4	25.4	25.4	25.4
X行程X-axis movement	204	254	254	304	304
绗缝厚度Quilting thickness	≤50	≤50	≤50	≤50	≤50
步长Stitch	2-8	2-8	2-8	2-8	2-8
生产速度Output	10-210m/h	10-210m/h	10-210m/h	10-210m/h	10-210m/h
机针型号Needle type	#14,#16,#19	#14,#16,#19	#14,#16,#19	#14,#16,#19	#14,#16,#19
主轴转速Rolling speed	500-1000r/min	500-1000r/min	500-1000r/min	500-1000r/min	500-1000r/min
电压(AC)Rated voltage(AC)	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ
功率Power	4kw	5.5kw	6.5kw	7.5kw	7.5kw

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
 ※Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification.
 The pictures in catalogue are consult only. If there is any change, please according to the real object.

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
 ※Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification.
 The pictures in catalogue are consult only. If there is any change, please according to the real object.



C系列电脑飞梭多针绗缝机

C Series Computerized High-end Shuttle Multi-needle Quilting Machine

用途 USE:

绗缝加工品：服装、睡袋、夏凉被、床罩、各种座垫等。
Products: garments, sleeping bags, quilts, bedspreads and all kinds of cushions etc.

示意图/working scheme

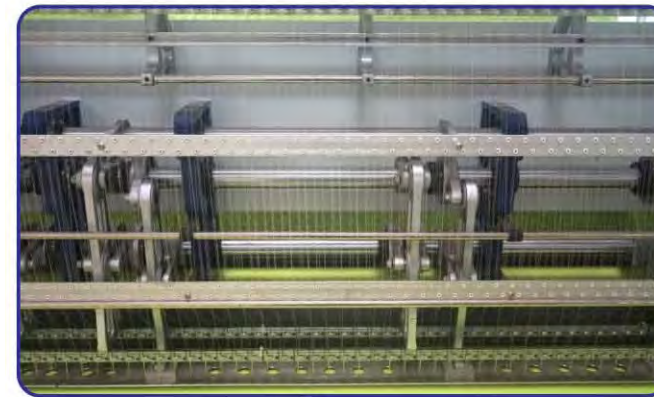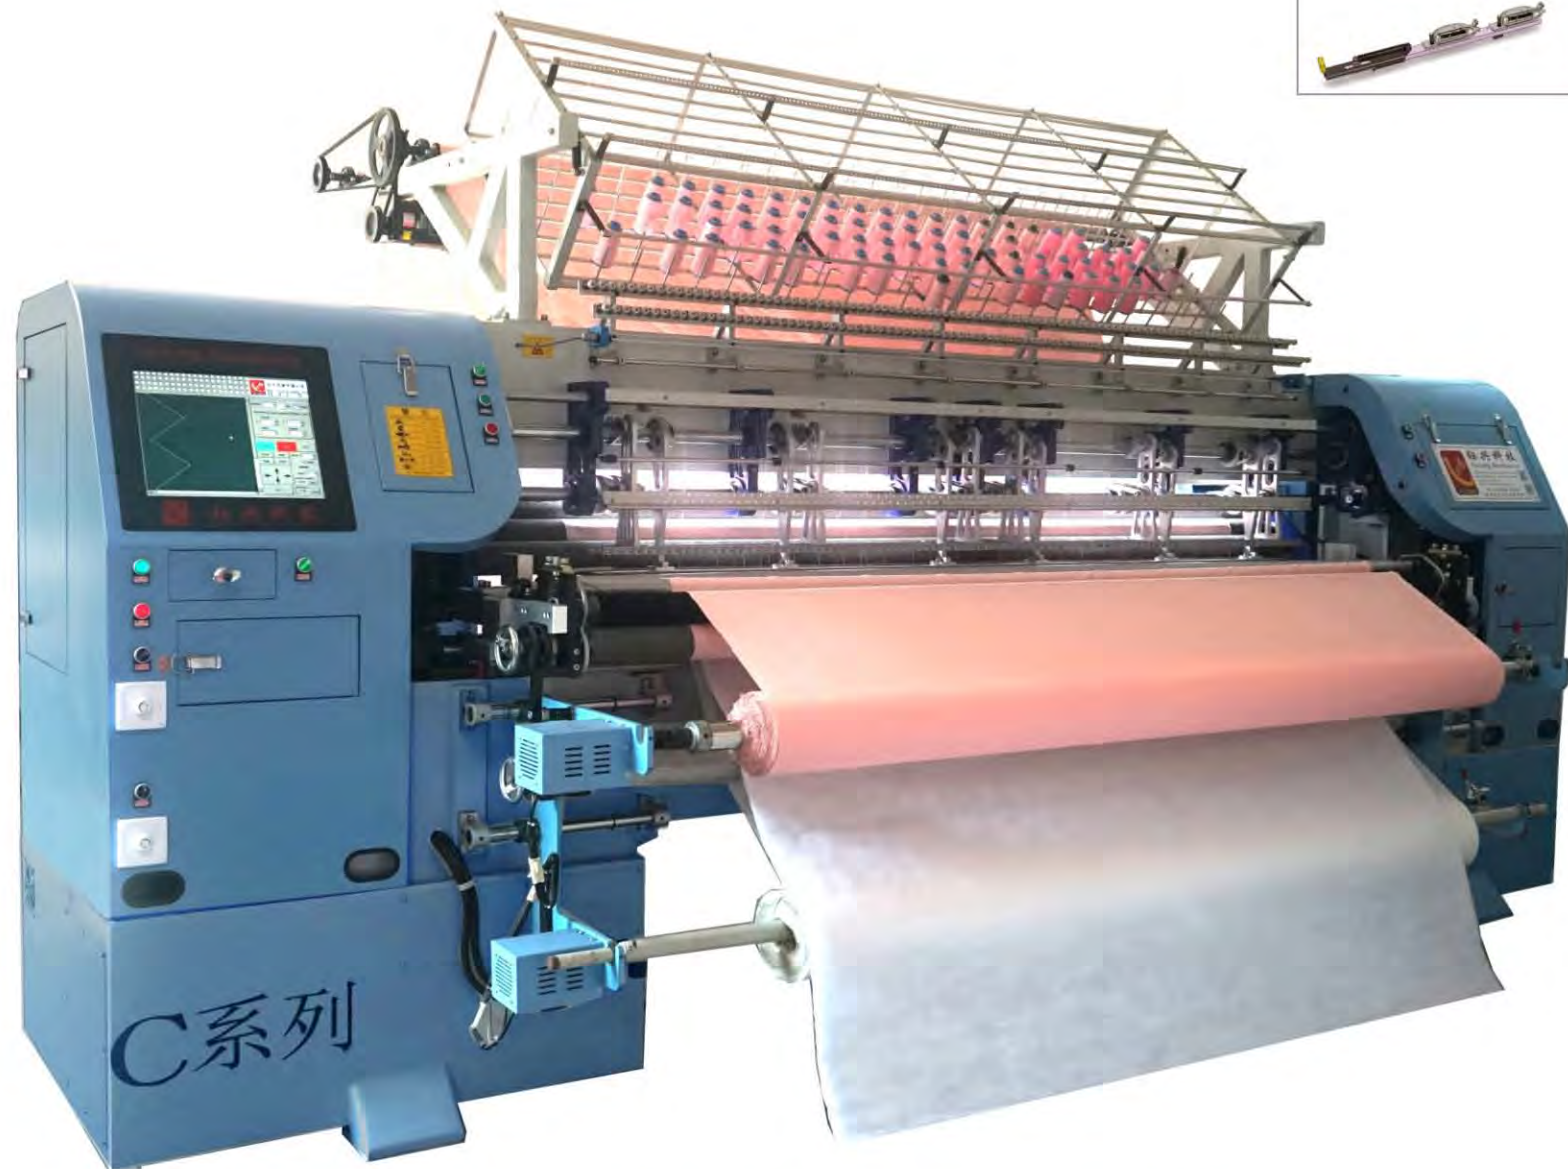

功能 FUNCTION:

- 1.先进的电脑控制和机械制造工艺技术。
- 2.针排运动采用针杆架机构,无需另外加油,从而避免了油污面料的现象发生。
- 3.针杆架机构结构更牢固不易损坏,维护费用低。
- 4.鞍架及罗拉均采用伺服驱动设备。
- 5.采用鞍架导轨运动方式,运行稳定,花型更漂亮,断线率更低。
- 6.主轴采用变频控制装置。
- 7.电脑调整速度300-800之间,针距2mm-6mm任意设定。
- 8.可做360度任意绗缝和无限次花样跨步绗缝。
- 9.图案补偿功能,有效的解决因绗缝材料加厚产生图案变形问题。
- 10.先进实用的面线断线检测技术,断线自动停机功能。

- 1.Adopt the advanced computer and mechanical manufacturing process technology.
- 2.The needle bar running with needle bar frame,no need to add extra lube and avoid the materials be soiled by lube.
- 3.Needle bar frame structure is more firm and durable,so that the cost of maintenance is cheaper.
- 4.Both the saddle frames and the rollers are imported servo drive equipment.
- 5.Adopt sadding rack guide rail,steady running,patterns are more precise,lower thread break rate.
- 6.Principal axis adopt the frequency conversion device.
- 7.Adjust speed by computer and the speed can reach 300-800r/min,the stitch can be set between 2mm-6mm.
- 8.360° random quilting and limitless multi-span and independent quilting.
- 9.The compensation function, an effective solution for looping pattern with thick material.
- 10.Advanced and practical testing upper thread broken techniques,the machine will auto-stop when thread is broken.

主要技术参数/Main Technical Parameters

参数 (单位mm) Parameter(Unit mm)	YXS-64-2C/YXS-64-3C	YXS-82-2C/YXS-82-3C	YXS-96-2C/YXS-96-3C	YXS-112-2C/YXS-112-3C	YXS-128-2C/YXS-128-3C
主机尺寸Size:L*W*H	3600*1500*1700	4300*1500*1700	4600*1500*1700	5100*1500*1700	5500*1500*1700
全机重量Weight	3500kg	4300kg	4600kg	5200kg	5500kg
绗缝宽度Quilting width	1650	2100	2450	2800	3200
针排距Needle bar space	2C 76.2(3")3C 152.4(3"+3")	2C 76.2(3")3C 152.4(3"+3")	2C 76.2(3")3C 152.4(3"+3")	2C 76.2(3")3C 152.4(3"+3")	2C 76.2(3")3C 152.4(3"+3")
针距Needle space	25.4	25.4	25.4	25.4	25.4
X行程X-axis movement	204	254	254	304	304
绗缝厚度Quilting thickness	≤50	≤50	≤50	≤50	≤50
步长Stitch	2-6	2-6	2-6	2-6	2-6
生产速度Output	10-195m/h	10-195m/h	10-195m/h	10-195m/h	10-195m/h
机针型号Needle type	#14,#16,#19	#14,#16,#19	#14,#16,#19	#14,#16,#19	#14,#16,#19
主轴转速Rolling speed	500-800r/min	500-800r/min	500-800r/min	500-800r/min	500-800r/min
电压(AC)Rated voltage(AC)	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ	380V/50HZ 220V/60HZ
功率Power	3.5kw	5kw	6kw	7kw	7kw

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification.
The pictures in catalogue are consult only. If there is any change, please according to the real object.

※免责声明：如外观和具体参数有做修改，厂家不做另行通知，请以实物为准。
※ Disclaimer: The manufacturer reserves the right to amend appearance and parameters without prior notification.
The pictures in catalogue are consult only. If there is any change, please according to the real object.